

## LASER TRACKING DEVICE B-SNIPER 02

To be installed on the bracket of your press brake, it gives immediate speed and precision that pay off your work.


- *How many pieces did you throw away this year?*
- *How much time have you wasted?*
- *How much money did you not collect because of this?*

With B-Sniper 02 **no more positioning errors** even with large radius punches.

Especially with large pieces, diamonds, calendaring and irregular or conical shapes B-Sniper 02 is an unbeatable tool:

**UP TO MORE  
THAN 67% OF TIME SAVED  
IN POSITIONING**

*(data based on real tests and simulations)*

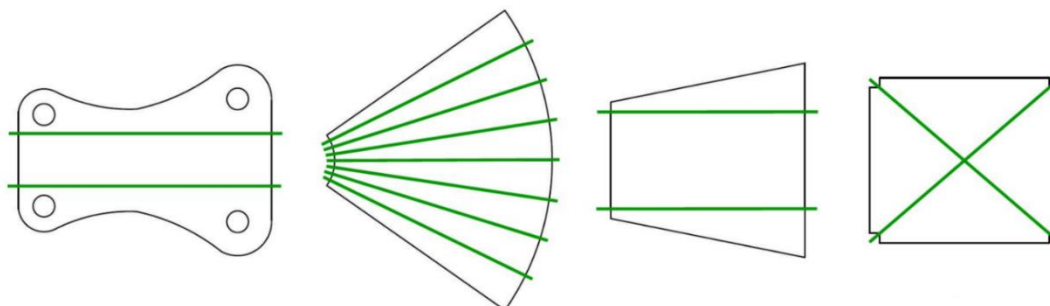

**TRIVENETA IMPIANTI S.r.l.**






Administrative Headquarters: Via Scopella, 22 - 37060 Castel d'Azzano VR - Italy

Operational Headquarters: Via Bovolino, 18/B - 37060 Buttapietra VR - Italy

Phone: +39 045 518 747 - Fax +39 045 854 56 05 - Web Site: [www.trivenetaimpianti.com](http://www.trivenetaimpianti.com) - E-mail: [sales@trivenetaimpianti.com](mailto:sales@trivenetaimpianti.com)

Mounted on the bracket, B-Sniper 02 **traces a high visibility laser beam on the piece to be bent** to simulate the bending line. The operator has just to **match the references traced on the piece to the line projected by B-Sniper 02.**

Universal installation and immediate and intuitive use,  
thanks to B-Sniper 02 **some programming parts will no longer be necessary,**  
with the **certainty of obtaining reliable results** even in multi-station.

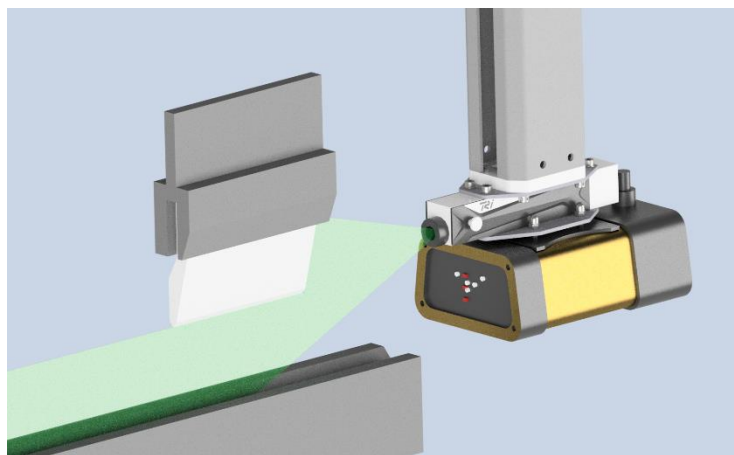

Equipped with rechargeable batteries and battery charger, B-Sniper 02 is **very easy to install** on the bracket of your press brake and is **immediately ready for use.**

## LASER TECHNICAL FEATURES

Wavelength: 532nm  
Power output: <5mW,  
Output mode: continuous  
Input voltage: 3,7 V DC  
Operating current: < 300mA (<600mA per il 50mW)  
Operating temperature: 20°C-30°C  
Beam: linear (90° opening)  
Divergence: 1.4mrad  
Medium life: >4000 hours  
Casing material: brass  
Length: 31mm  
Diameter: 12mm

## TECHNICAL CHARACTERISTICS OF THE BATTERY CHARGER

Keenstone 26650 Universal Battery Charger 2 Slot  
Display LCD  
Provided Nr. 2 Rechargeable Batteries  
Batteries: Li-Ion SAMSUNG INR18650-35E 3,6V 3000mAh

## BEAM VISIBILITY DURATION

Continuous duration: 10 hours  
Batteries supplied: nr.2  
Battery life supplied: 10 hours each

## TRIVENETA IMPIANTI S.r.l.

Administrative Headquarters: Via Scopella, 22 - 37060 Castel d'Azzano VR - Italy

Operational Headquarters: Via Bovolino, 18/B - 37060 Buttapietra VR - Italy

Phone: +39 045 518 747 - Fax +39 045 854 56 05 - Web Site: [www.trivenetaimpianti.com](http://www.trivenetaimpianti.com) - E-mail: [sales@trivenetaimpianti.com](mailto:sales@trivenetaimpianti.com)