

If you **bend large sheet metal** and your **operators find it difficult** the solution to facilitate them while **ensuring safety and speed of execution** is our banding aid Up.

With manual handling by trolley and stationary feet,  
UP 300 BASIC is **manually moved vertically and horizontally** by means of handwheels  
with provision for our suction cup kit COD. 025 V - UP VACUUM  
and can be combined with UP CABINET SINGLE or DOUBLE electrical cabinet.

**Maximum capacity: 150kg**



Our Up:

- It is installed on the front of your current press brake
- It will **increase the productivity** of the machine
- Your operators will be able to **work more fluidly**
- It **reduces the risk of injury** to the worker (eg tilting the sheet)

Up helps the operator to improve his job,  
**protecting his life and your business**  
**while increasing productivity.**

**TRIVENETA IMPIANTI S.r.l.**





Administrative Headquarters: Via Scopella, 22 - 37060 Castel d'Azzano (VR) - Italy

Operational Headquarters: Via Bovolino, 18/B - 37060 Buttapietra (VR) - Italy

Phone: +39 045 518 747 - Fax +39 045 854 56 05 - Web Site: [www.trivenetaimpianti.com](http://www.trivenetaimpianti.com) - Email: [sales@trivenetaimpianti.com](mailto:sales@trivenetaimpianti.com)

Up is a banding aid that we define “sheet follower” and helps the operator to improve his work by **protecting his safety and facilitating him** so as to help in turn your company to **increase the quality and speed** of production.

**DIMENSIONS:** Width 760mm - Length 1100mm  
**HEIGHT:** adjustable from 950mm to 1150mm  
**ROTATION CENTRE:** 300mm  
**SUPPORT TOP DIMENSIONS:** 500 x 1000, extendable up to 1500mm  
**WEIGHT:** 580 kg  
**AVAILABLE TORQUE:** 150 kgm  
**ANGLE OF INCLINATION OF THE PLANE:** 0° / 75°  
**ACCURACY:** +/- 0.5°  
**FORWARD/BACKWARD ADJUSTMENT:** manual run of 120mm  
**HEIGHT ADJUSTMENT:** manual run 200mm  
**SAFETY BRAKE SEPARATED FROM THE ENGINE**

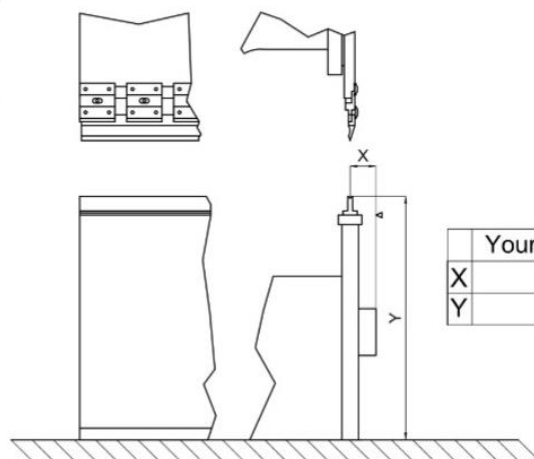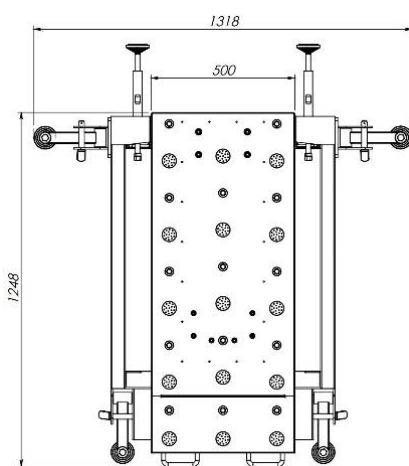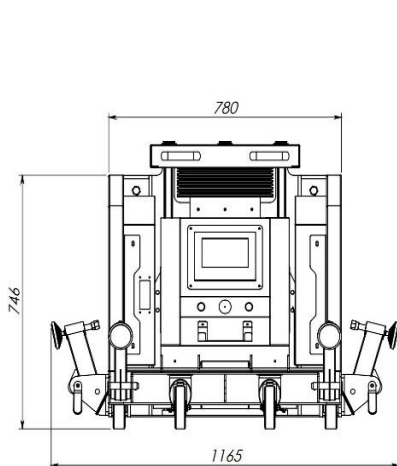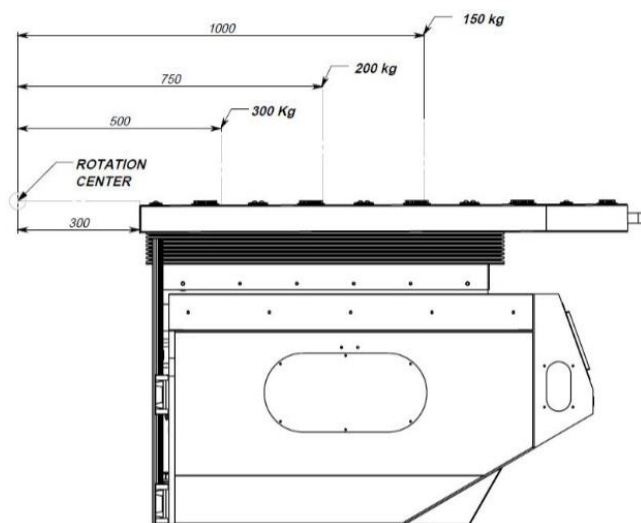

	Yours	Up range
X		0-300
Y		850-1150